



GENERAL ACCESSORIES FOR 750-500W



SOUND ABATING ENCLOSURE

Ultrasonic processing produces high pitched noise, which originates from the vessel walls and the liquid surface. The sound enclosure reduces the noise to comfortable levels. A support rod and converter clamp are included. Access ports are available on both sides and the top of the enclosure.

OUTSIDE DIMENSIONS:
(H x W x D) 30.5" x 13.5" x 13"
(775 x 343 x 330 mm)

INSIDE DIMENSIONS:
(H x W x D) 29" x 12.5" x 12"
(737 x 318 x 305 mm)

PART NO.
830-00427



SUPPORT STAND WITH CLAMP


Securely support the ultrasonic processor with a chemically resistant plastic holder on a 5.5" x 9" cast-iron base with 0.5" diameter rod.

The converter clamp and support stand can be ordered separately.

PART NO.
830-00459



PART NO.
830-00116

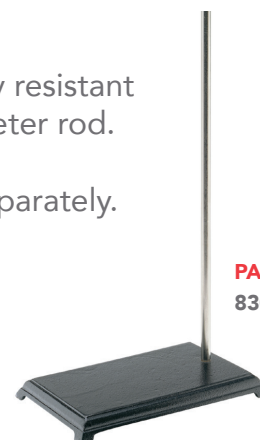

PART NO.
830-00109

HEAVY DUTY SUPPORT ASSEMBLY

Supports the converter and multi-element probe with minimum deflection. Includes lab jack. Recommended when working with any multi-element horn.


PART NO.
830-00130



LABORATORY JACK

Provides adjustable elevation from 2 1/2" (64 mm) to 10" (254 mm). Top plate: 6" x 6" (152 x 152 mm).

PART NO.
830-00113

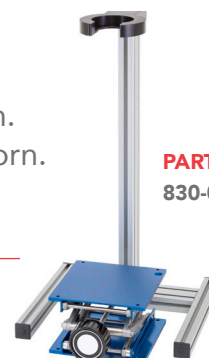

ROSETTE GLASS COOLING CELLS

The rosette is a glass cell that enables uniform treatment at low temperatures. Fill the rosette with your liquid sample and place it in an ice bath. The ultrasonic energy forces the sample to circulate under the probe and through the cooling arms.



300mL Rosette

PART NO.
830-00001

30mL Rosette

PART NO.
830-00003



JACKETED BEAKERS

The jacketed beaker is attached to a chiller or another cold water source. The chilled water is circulated around the liquid within the beaker maintaining the desired sample temperature.

10 mL cooling cell
with water jacket

PART NO.
830-00009

100 mL cooling cell
with water jacket

PART NO.
830-00010

TEMPERATURE PROBE

Enables temperature monitoring from 1 – 100°C.

PART NO.
830-00060



REPLACEMENT CONVERTER



PART NO.
CV334

REPLACEMENT CONVERTER CABLE

6' (1.8m) length

PART NO.
201-0300



REPLACEMENT WRENCH SET

The 750 and 500W ultrasonic processors include 2 spanner wrenches and a $\frac{9}{16}$ " x $\frac{7}{16}$ " open end wrench.



PART NO.
381-0005

HAND HELD FREQUENCY METER

Check the frequency of energized probes, converters and boosters
Frequency range:
10.00 kHz - 80.00 kHz



PART NO.
833-00012

FOOTSWITCH

For hands-free operation with 10' (3m) cable.

PART NO.
830-00004

